

Q-Series MODEL Q-CS LOUDSPEAKER

For Low (8' to 14') Ceiling Installations Requiring:

- Clear voice announcements
- Full range music reproduction, even at background levels


Features:

- Smooth hemispherical coverage pattern
- Flat frequency response
- Accurate, full range voice and music reproduction without electronic processing
- High sensitivity (89dB 1W/1m)
- Fewer units produce results superior to conventional ceiling loudspeakers
- Exclusive patent pending Broadband Linear Excursion Control for high sensitivity and accurate, articulate low frequency performance
- Exclusive patent pending Exponential Diffusion Control for smooth mid and high frequencies throughout the coverage area at any volume level
- Integral transformer for 25V, 70V and 100V constant voltage systems
- Unit shipped fully assembled
- Uses standard tile bridge for 8" speakers

The Model Q-CS specifications are subject to improvement and modification. Log on to www.soundsphere.com for updated specifications or call (203)386-9200 for updated literature.

Applications:

- Office Buildings
- Restaurants
- Bars/Nightclubs
- Hotel Lobbies
- Courtrooms
- Classrooms
- Retail and grocery stores
- Other low-ceiling applications where clear voice announcements and full range music are required

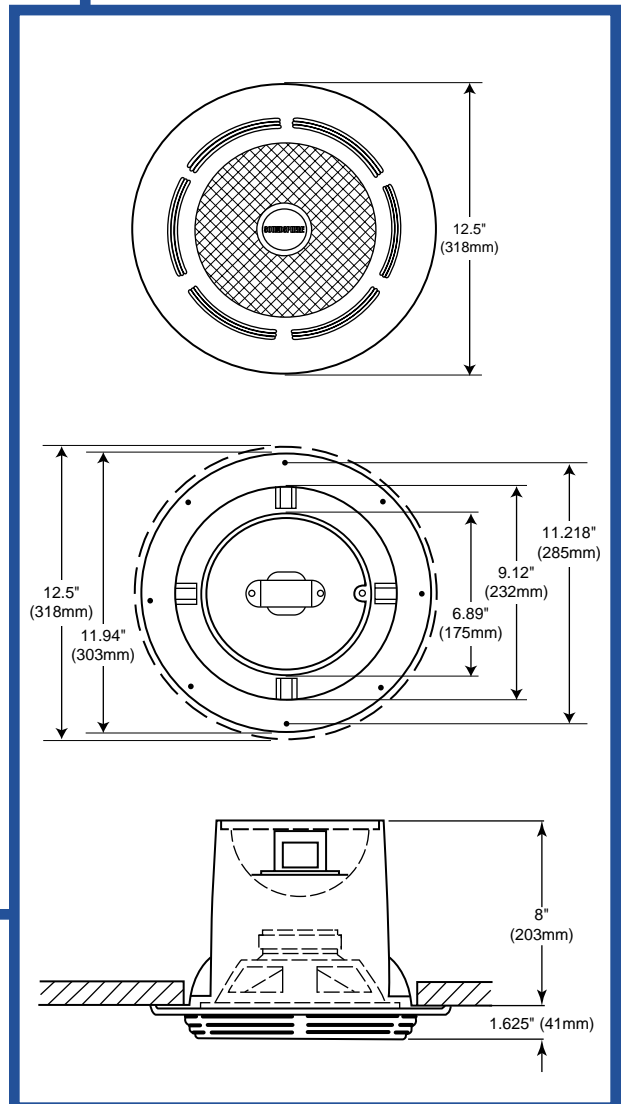

SOUNDSPHERE®

Division of Sonic Systems, Inc

10 Research Drive, Stratford, CT 06615
 (203) 386-9200 • Fax: (203) 386-0773
 Web: www.soundsphere.com

Specifications:

Sensitivity 89dB 1 Watt/1 meter
Maximum SPL 101dB 15 Watts/1 meter
Power Handling 15 Watts RMS
Frequency Response 55Hz-16kHz ±4dB
Coverage 180° vertical
 360° horizontal
Available Power Taps 25V, 70V, 100V
 15W, 7.5W, 3.8W, 1.9W,
 1W, 0.5W
Weight 7.25 lbs. (3.3 kilos)
Size Enclosure: 7" dia. x 8.188" high
 (178mm x 208mm)
 Mounting flange: 12" dia. (303mm)
 Grille: 12.5" dia. x 1.625" high
 (318mm x 41mm)
Driver Coaxial: 8 inch LF,
 ½ inch dome HF
Material ABS Resin

Spacing in Multiple Loudspeaker Systems


		Direct Field SPL Variation in dB			
		3 (±1.5)	4 (±2.0)	5 (±2.5)	6 (±3.0)
Floor-to-Ceiling Height in Feet	8' (2.45M)	14' (4.27M)	16' (4.88M)	18' (5.49M)	21' (6.40M)
	10' (3.05M)	21' (6.40M)	24' (7.32M)	27.5' (8.38M)	32' (9.76M)
	12' (3.65M)	27' (8.23M)	32' (9.76M)	36' (10.98M)	42' (12.81M)
	14' (4.25M)	33' (10.06M)	38' (11.59M)	45' (13.72M)	52' (15.85M)

Based on nominal ear height of 4 feet (1.22M)


Direct Field SPL (dB) vs. Power and Mounting Height

		Power per Loudspeaker in Watts					
		15	7.5	3.7	2	1	0.5
Floor-to-Loudspeaker Height in Feet	8' (2.45M)	99	96	93	90	87	84
	10' (3M)	95.5	92.5	89.5	86.5	83.5	80.5
	12' (3.65M)	93	90	87	84	81	78
	14' (4.25M)	91	88	85	82	79	76

Based on nominal ear height of 4 feet

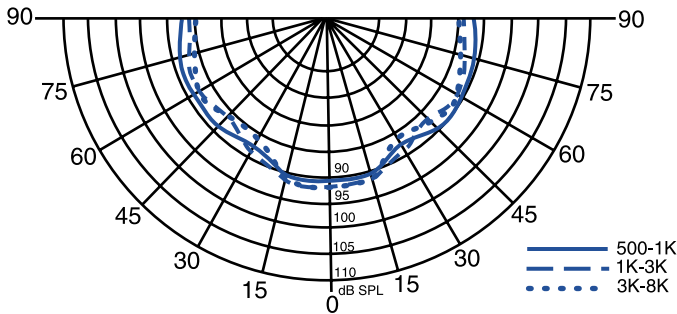

Vertical Polar Response

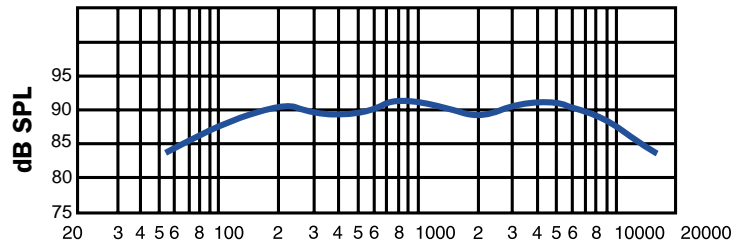

Hemispherical Power Response 1W/1m

Architects and Engineers Specifications

The loudspeaker shall be a self-contained, wide range device with a broad coverage pattern. The frequency response shall be 55Hz to 16kHz ± 4dB; the vertical polar coverage shall be 180° within ± 5dB.

The loudspeaker shall have a minimum sensitivity of 89dB SPL at 1 Watt/1 meter, a continuous power handling capability of 15 Watts, and a rated impedance of 8 ohms. The loudspeaker shall have an integral 15 Watt transformer for 25, 70, or 100 Volt constant voltage systems.

The loudspeaker driver shall be one 8 inch woofer with a ½ inch dome tweeter mounted coaxially. The driver shall be mounted in a cylindrical enclosure molded from ABS resin. Hardware shall be stainless or plated steel. An optional steel or aluminum bridge shall be available for supporting the loudspeaker in suspended ceiling tiles. A decorative grille shall be provided.

The loudspeaker enclosure shall measure 7 inches (178 millimeters) in diameter and 8.188 inches (208 millimeters) in height. The enclosure mounting flange shall be 12 inches (303 millimeters). The decorative grille shall be 12.5 inches (317.5 millimeters) in diameter and 1.625 inches (28.6 millimeters) in height. The complete loudspeaker shall weigh 7.25 lbs. (3.3 kilograms). The loudspeaker shall be the **SoundSphere® Model Q-CS**.

Warranty

SoundSphere® loudspeakers are warranted against failure or malfunction due to defects in materials or workmanship for a period of five years from date of original purchase. Defective units will be repaired or replaced at our option if delivered prepaid to our factory. Repaired or replaced units will be returned at our expense. Warranty does not cover appearance or damage caused by abuse, misuse, neglect, accident, or exceeding maximum rated power. Warranty does not cover labor costs involved in removing and/or reinstalling the defective unit, nor any liability due to accidents caused by improper installation. Warranty is extended to original purchaser and is not transferable.